


HD1 heat detector range

Ex d, Ex em & Ex ia

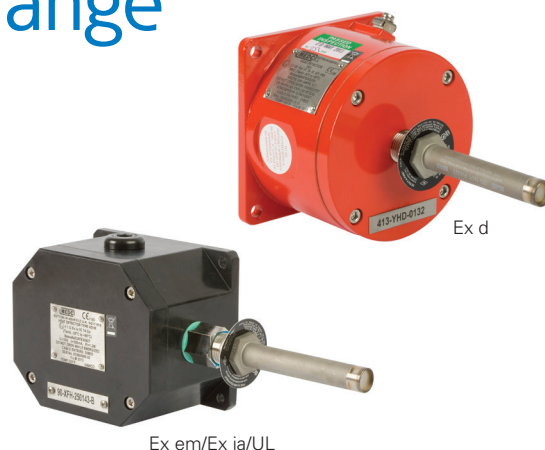

Overview

The Eaton heat detector has been designed for use in hazardous environments. These units are suitable for fire alarm and/or suppression systems in offshore and onshore applications including paint spray booths, flammable material stores, turbine rooms, extract ductwork and other hazardous areas throughout the oil & gas, petrochemical and process industries.

Comprising a Fenwal rate-compensated detector with all-stainless steel external construction, mounted to either a type SM87 marine grade alloy enclosure (Exd version) or JB10 corrosion-free GRP enclosure (Ex ia, Ex em/UL versions). The contact in the detector CLOSSES at alarm temperature.

To select appropriate temperature setting see specification on reverse.

Features

- Zone 0, Zone 1 and Zone 2 use
- ATEX certified
 - EExd IIB T3/T6
 - Exd IIC T6
 - EExem IIT4/T6
 - Ex ia IIC T4/T6
- IECEx certified
 - Ex ia IIC T4/T6 Ga
- UL listed for USA and Canada:
 - Class I, Div 2, Groups A, B, C D
- TR CU certified
- CQST certified
- CCOE certified
- SIL 2 certified
- IP66 & IP67
- Certified temperature:
 - -20°C to +125°C (Exd)*
 - -20°C to +55°C (Exem/UL)
 - -55°C to +55°C (Exia)
- Stainless steel probe
- Detector temperature settings: 60°C to 385°C, (140°F to 725°F)
- Marine grade alloy or GRP enclosure
- Optional stainless steel guard

*Model dependent



ATEX EEx d IIB	Cert. no. Baseefa03ATEX0447 Certified to: EN50014, EN50018, EN50281-1-1 Ex II 2 GD, EEx d IIB T6 (T3 @ 125°C)
ATEX Ex d IIC	Cert. no. Baseefa08ATEX0320 Certified to: EN60079-0, EN60079-1, EN61241-0, EN61241-1 Ex II 2 GD, Ex d IIC T6, Ex tD A21 T85°C (-20°C to + 55°C)
ATEX EEx em	Cert. no. Baseefa03ATEX0428 Certified to: EN50014, EN50019, EN50028 Ex II 2G, EEx em II T6 (-20°C to + 55°C)
ATEX Ex ia	Cert. no. Baseefa03ATEX0427 Certified to: EN60079-0, EN60079-11 Ex II 1G, Ex ia IIC T6 Ga (-55°C to + 55°C). (T4 with diodes/resistors)
IECEx Ex ia	Cert. no. IECEx BAS 13.0010 Certified to: IEC60079-0, IEC60079-11 Ex ia IIC T6 Ga (-55°C to + 55°C). (T4 with diodes/resistors)
UL	Listing no. E252920 – versions up to 450°F Listing no. E254077 – versions from 600°F to 725°F UL for USA and Canada, listed to Class 1, Div 2. Groups A, B, C, D
TR CU	1Ex d IIB T3/T6 1Ex d IIC T4 /T6 2Ex de IIC T4/T6 0Ex ia IIC T4/T6 Russian Fire Approved
CQST	Certified Ex ia
SIL	SIL2 certified. Cert no. Sira FSP 12007/02

Material	Detector: Stainless steel Enclosures: Ex d – LM25 marine grade alloy Ex ia/Ex em/UL – GRP (anti-static) Cover screws: Stainless steel Optional guard: 316 stainless steel
Finish	Detector: Sand blasted. Enclosures: Ex d painted to customers specification Ex ia/Ex em/UL - Natural black or painted to customer's specification
Certified temp	Ex em, UL, Ex d IIC, CQST Ex d IIB: -20°C to 55°C (T6) -20°C to 90°C (T4) Ex d IIB (Not CQST): -20°C to 55°C (T6) -20°C to 125°C (T3) Ex ia: -55°C to 55°C (T6)
Weight	Ex d, 2kg Ex ia/Ex em/UL, 1.1kg
Ingress protection	IP66 & IP67
Operation	The detector contact is normally open and CLOSES at alarm temperature
Contact rating	Ex d IIB, Ex em, UL: 125Vac - 5A, 125Vdc - 0.5A, 48Vdc -1A, 24Vdc - 2A Ex d IIC: 24V - 0.1A Ex ia: 30V - 300mA
Entries	2 x M20 (Ex d/Ex em/Ex ia versions) 2 x ½" NPT via adaptors (UL version)
Terminals	6 x 4mm² (BK6)
Resistor	Series & EOL resistor (maximum total 2) minimum value (each) 470Ω
Diodes	Up to 2 off available in Ex d IIB, Ex d IIC and Ex ia versions - contact sales office
Labels	Optional stainless steel tag and duty labels

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Certification	Type	Temp settings	Options	Finish																																																																																						
HD1																																																																																											
	<table border="1"> <thead> <tr> <th>Certification</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>ATEX</td> <td>B</td> </tr> <tr> <td>IECEX</td> <td>J</td> </tr> <tr> <td>ATEX/IECEX dual listed</td> <td>AJ</td> </tr> <tr> <td>UL listed</td> <td>UL</td> </tr> <tr> <td>ATEX/UL dual listed</td> <td>AU</td> </tr> <tr> <td>TR CU</td> <td>G*</td> </tr> <tr> <td>CQST</td> <td>Q†</td> </tr> </tbody> </table> * Russian Fire Approved as standard † Only available Ex ia certified. Not for use in China on fire alarm systems	Certification	Code	ATEX	B	IECEX	J	ATEX/IECEX dual listed	AJ	UL listed	UL	ATEX/UL dual listed	AU	TR CU	G*	CQST	Q†	<table border="1"> <thead> <tr> <th>Type</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Ex d IIB</td> <td>BD</td> </tr> <tr> <td>Ex d IIC</td> <td>CD*</td> </tr> <tr> <td>Ex em</td> <td>E†</td> </tr> <tr> <td>Ex ia</td> <td>I‡</td> </tr> <tr> <td>UL</td> <td>U</td> </tr> </tbody> </table> * Ex d IIC only available in ATEX † ATEX/UL dual listed Ex em version only ‡ IECEX and ATEX/IECEX dual listed only available Ex ia	Type	Code	Ex d IIB	BD	Ex d IIC	CD*	Ex em	E†	Ex ia	I‡	UL	U	<table border="1"> <thead> <tr> <th>Temp°F</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>140</td> <td>140</td> </tr> <tr> <td>160</td> <td>160</td> </tr> <tr> <td>190</td> <td>190</td> </tr> <tr> <td>210</td> <td>210</td> </tr> <tr> <td>225</td> <td>225</td> </tr> <tr> <td>275</td> <td>275</td> </tr> <tr> <td>325</td> <td>325</td> </tr> <tr> <td>360</td> <td>360</td> </tr> <tr> <td>450</td> <td>450</td> </tr> <tr> <td>500</td> <td>500</td> </tr> <tr> <td>600</td> <td>600</td> </tr> <tr> <td>725</td> <td>725</td> </tr> </tbody> </table>	Temp°F	Code	140	140	160	160	190	190	210	210	225	225	275	275	325	325	360	360	450	450	500	500	600	600	725	725	<table border="1"> <thead> <tr> <th>Option</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>None</td> <td>N</td> </tr> <tr> <td>Duty label</td> <td>D*</td> </tr> <tr> <td>Tag label</td> <td>T*</td> </tr> <tr> <td>Guard</td> <td>G</td> </tr> <tr> <td>Resistor EOL</td> <td>E*†‡</td> </tr> <tr> <td>Resister series</td> <td>S*†‡</td> </tr> <tr> <td>Diode(s)</td> <td>D*†‡</td> </tr> <tr> <td>Blanking plug</td> <td>P</td> </tr> </tbody> </table> * Please specify † Only available in Ex d IIB, Ex d IIC, or Ex ia versions (specify value) ‡ Not available with UL or ATEX/UL Dual Listed	Option	Code	None	N	Duty label	D*	Tag label	T*	Guard	G	Resistor EOL	E*†‡	Resister series	S*†‡	Diode(s)	D*†‡	Blanking plug	P	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Natural black</td> <td>N†</td> </tr> <tr> <td>Grey</td> <td>G</td> </tr> <tr> <td>Red</td> <td>R</td> </tr> <tr> <td>Blue</td> <td>B</td> </tr> <tr> <td>Yellow</td> <td>Y</td> </tr> <tr> <td>Special</td> <td>S*</td> </tr> </tbody> </table> * Please specify † Ex em/Ex ia/UL only	Finish	Code	Natural black	N†	Grey	G	Red	R	Blue	B	Yellow	Y	Special	S*
Certification	Code																																																																																										
ATEX	B																																																																																										
IECEX	J																																																																																										
ATEX/IECEX dual listed	AJ																																																																																										
UL listed	UL																																																																																										
ATEX/UL dual listed	AU																																																																																										
TR CU	G*																																																																																										
CQST	Q†																																																																																										
Type	Code																																																																																										
Ex d IIB	BD																																																																																										
Ex d IIC	CD*																																																																																										
Ex em	E†																																																																																										
Ex ia	I‡																																																																																										
UL	U																																																																																										
Temp°F	Code																																																																																										
140	140																																																																																										
160	160																																																																																										
190	190																																																																																										
210	210																																																																																										
225	225																																																																																										
275	275																																																																																										
325	325																																																																																										
360	360																																																																																										
450	450																																																																																										
500	500																																																																																										
600	600																																																																																										
725	725																																																																																										
Option	Code																																																																																										
None	N																																																																																										
Duty label	D*																																																																																										
Tag label	T*																																																																																										
Guard	G																																																																																										
Resistor EOL	E*†‡																																																																																										
Resister series	S*†‡																																																																																										
Diode(s)	D*†‡																																																																																										
Blanking plug	P																																																																																										
Finish	Code																																																																																										
Natural black	N†																																																																																										
Grey	G																																																																																										
Red	R																																																																																										
Blue	B																																																																																										
Yellow	Y																																																																																										
Special	S*																																																																																										

Exd version

37±0.2
7.5±0.1
CERTIFICATION LABEL
OPTIONAL GUARD
197±2
226.5±0.3
124±0.2
105.5±0.5 CRS
124±0.2
105.5±0.5 CRS

Exia / Exem / UL version

150
65
165
136
88.5
44.5
9.5
154
84
FIXING CENTRES
CERTIFICATION LABEL
OPTIONAL GUARD
4 OFF FIXING HOLES
67
GLAND

Temperature setting		Tolerance		Colour code of text on probe
(°F)	(°C)	(°F)	(°C)	
140	60	+7/-8	±4	Black
160	71	+7/-8	±4	Black
190	88	+7/-8	±4	White
210	99	+7/-8	±4	White
225	107	+7/-8	±4	White
275	135	±10	±6	Blue
325	163	±10	±6	Red
360	182	±10	±6	Red
450	323	±15	±8	Green
500	260	±15	±8	Orange
600	316	±20	±11	Orange
725	385	±25	±14	Orange